


GE 752 RB & US SHUNT-WOUND DRILLING MOTORS

50 FIELD AMPS AT 2800 SCFM VENTILATION

NOTE 1) OVERLOAD: RMS CURRENT FROM BEGINNING OF OVERLOAD TO BEGINNING OF SUCCEEDING OVERLOAD NOT TO EXCEED THE CONTINUOUS CURRENT RATING (GE) GIVEN AT HIGHEST VOLTAGE USED. DURATION OF AN OVERLOAD SHOULD NOT EXCEED TIMES INDICATED.

CHARACTERISTICS AND APPLICATION LIMITS

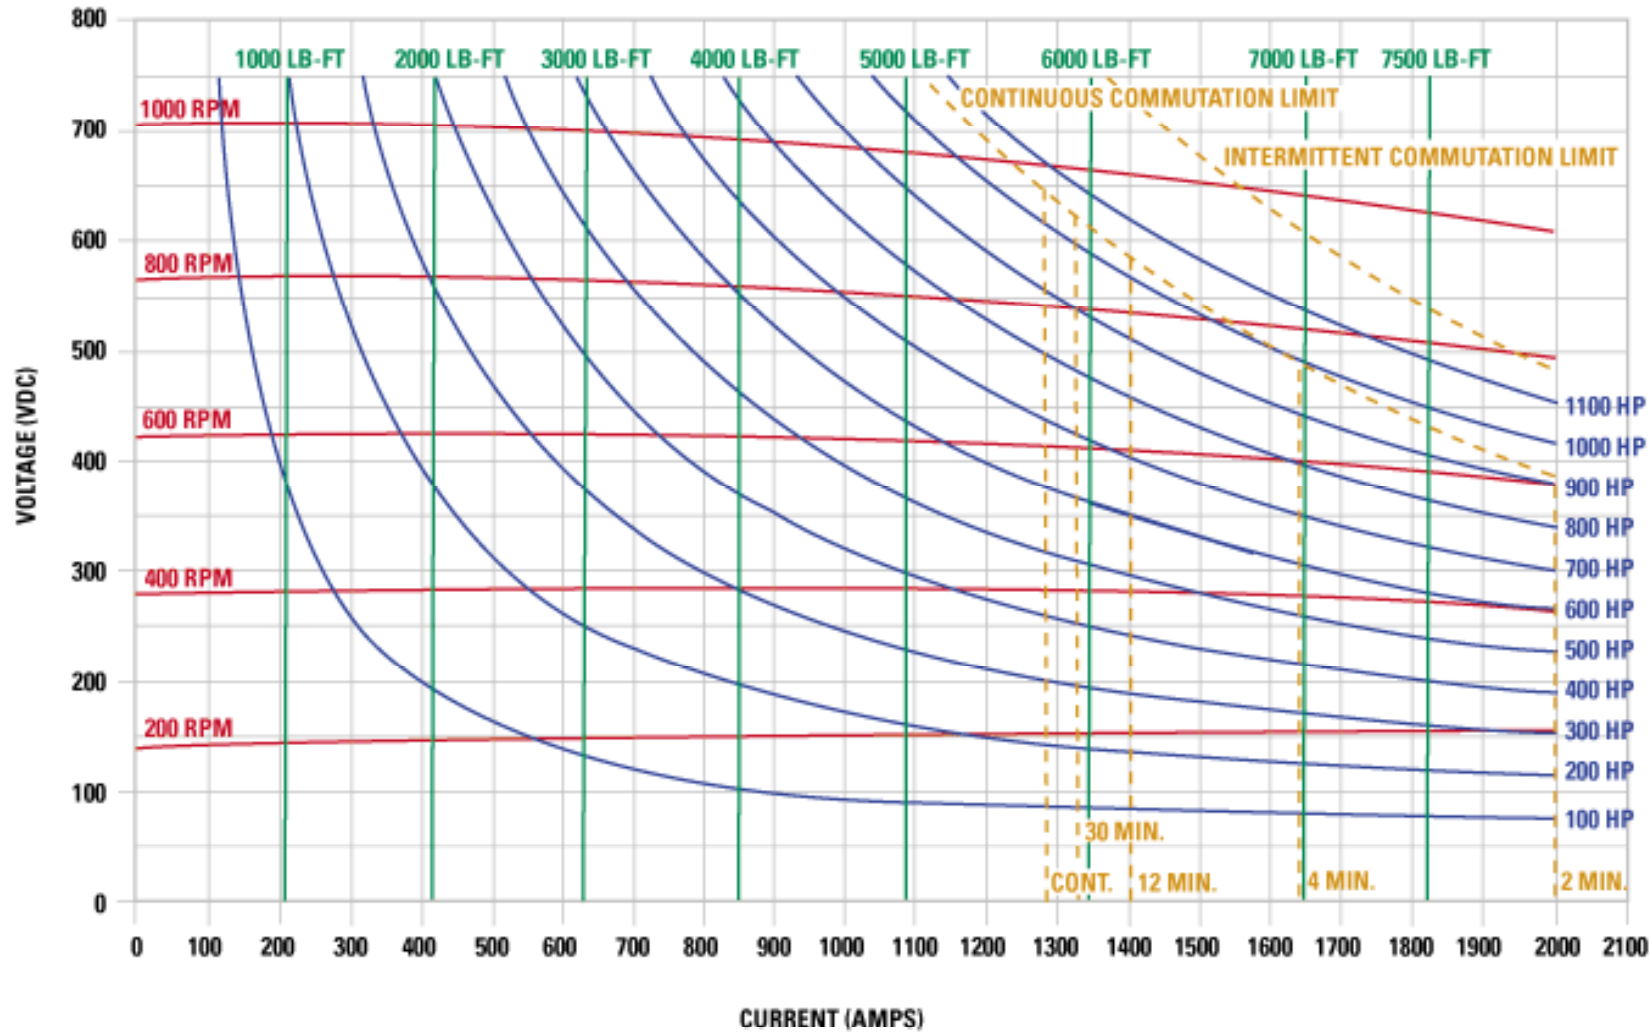

41H143727

This drawing, which contains proprietary information, is the property of General Electric Company. It shall not be reproduced in any manner nor disclosed to third parties without written permission of General Electric Company.